

LED LOWBAY LIGHT

ML-25 Series

- ★ IP68 (water proof, dust proof)
- ★ Proprietary NICHIA chip
- ★ High quality industrial grade powder coating
- ★ MEAN WELL switching AC power supply
- ★ High efficiency reflector



Model Number	ML-25040	ML-25060	ML-25080
Power (W)	40W	60W	80W
Luminaire Efficacy (lm)	3,330 - 3,750	4,700 - 5,300	5,700 - 8,200
Lumen per Watts of Light (lm/w)	83 - 94	79 - 88	71 - 102
Color Temperature (K)	3,000 ~ 5,000		
Input Voltage Range (VAC)	90 ~ 305		
View Angle	65° / 110°		
Operating Environment	Low bay, Factory, Architecture, Billboard, Outdoor, Parking lot		
Dimension (mm)	324(L) * 240(W) * 78(H)		
Fixture Weight (kg)	7 kg		
Test Result	IP68 IEC60598-1, Vibration JISF 8006 79, Anti-Corrosion DIN 50018, Impact IK07 IEC68-2-75/EN 62262		




RoHS COMPLIANT




▼ Mounting Accessories



▼ Uniformity

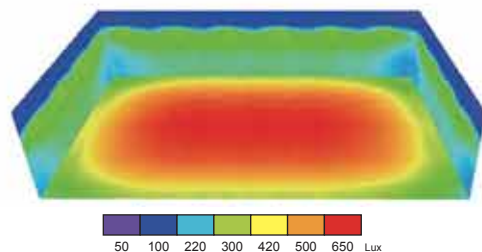

ML Series

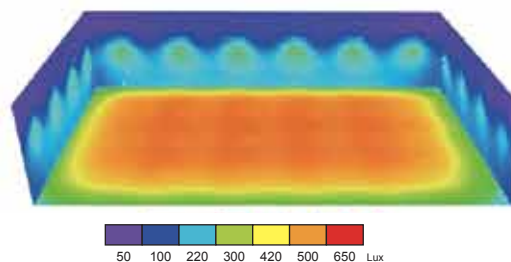

Others